

Battery chargers: T2420

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440


Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

T2420

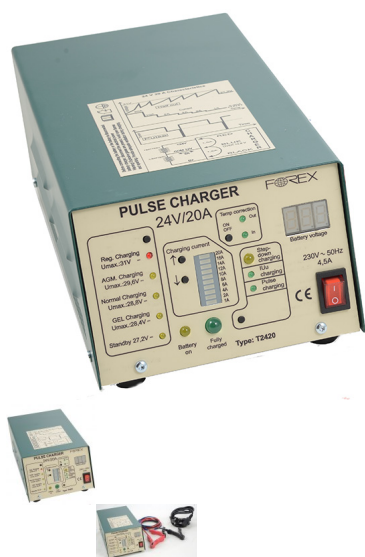

24V 20A battery charger processor controlled

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

T2420 Battery Charger

Forex T2420 is one of the most advanced battery charger on the market. Thank to the processor controlled technology it uses special charging

Battery chargers: T2420

characteristics which ensure the fast and safe charging and also the dischargeable capacity and lifespan of the battery is maximized. Practically it is the 24V version of the [12V 32 A \(T1232\) charger](#)

Technical specifications:

- Nominal input voltage: 230V AC, 50Hz/6000mA
- Nominal charging voltage: 24V DC
- Maximal charging current: 20A DC
- Max output voltage: 28,4V /28,8V /29,6V /31V
- Operation temperature: 0-40°C
- Size: 135*90*260mm
- Weight: 2,1 Kg
- IP class: 30
- Temperature compensation: -24C° és +55C°
- Adjustable cable correction