

Battery chargers: T4830

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440


Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

Warning: file_put_contents(/260916.ini): failed to open stream: Permission denied in /home/forexkft/public_html/en.forex.hu/libraries/joomla/filesystem/file.php on line 440

T4830

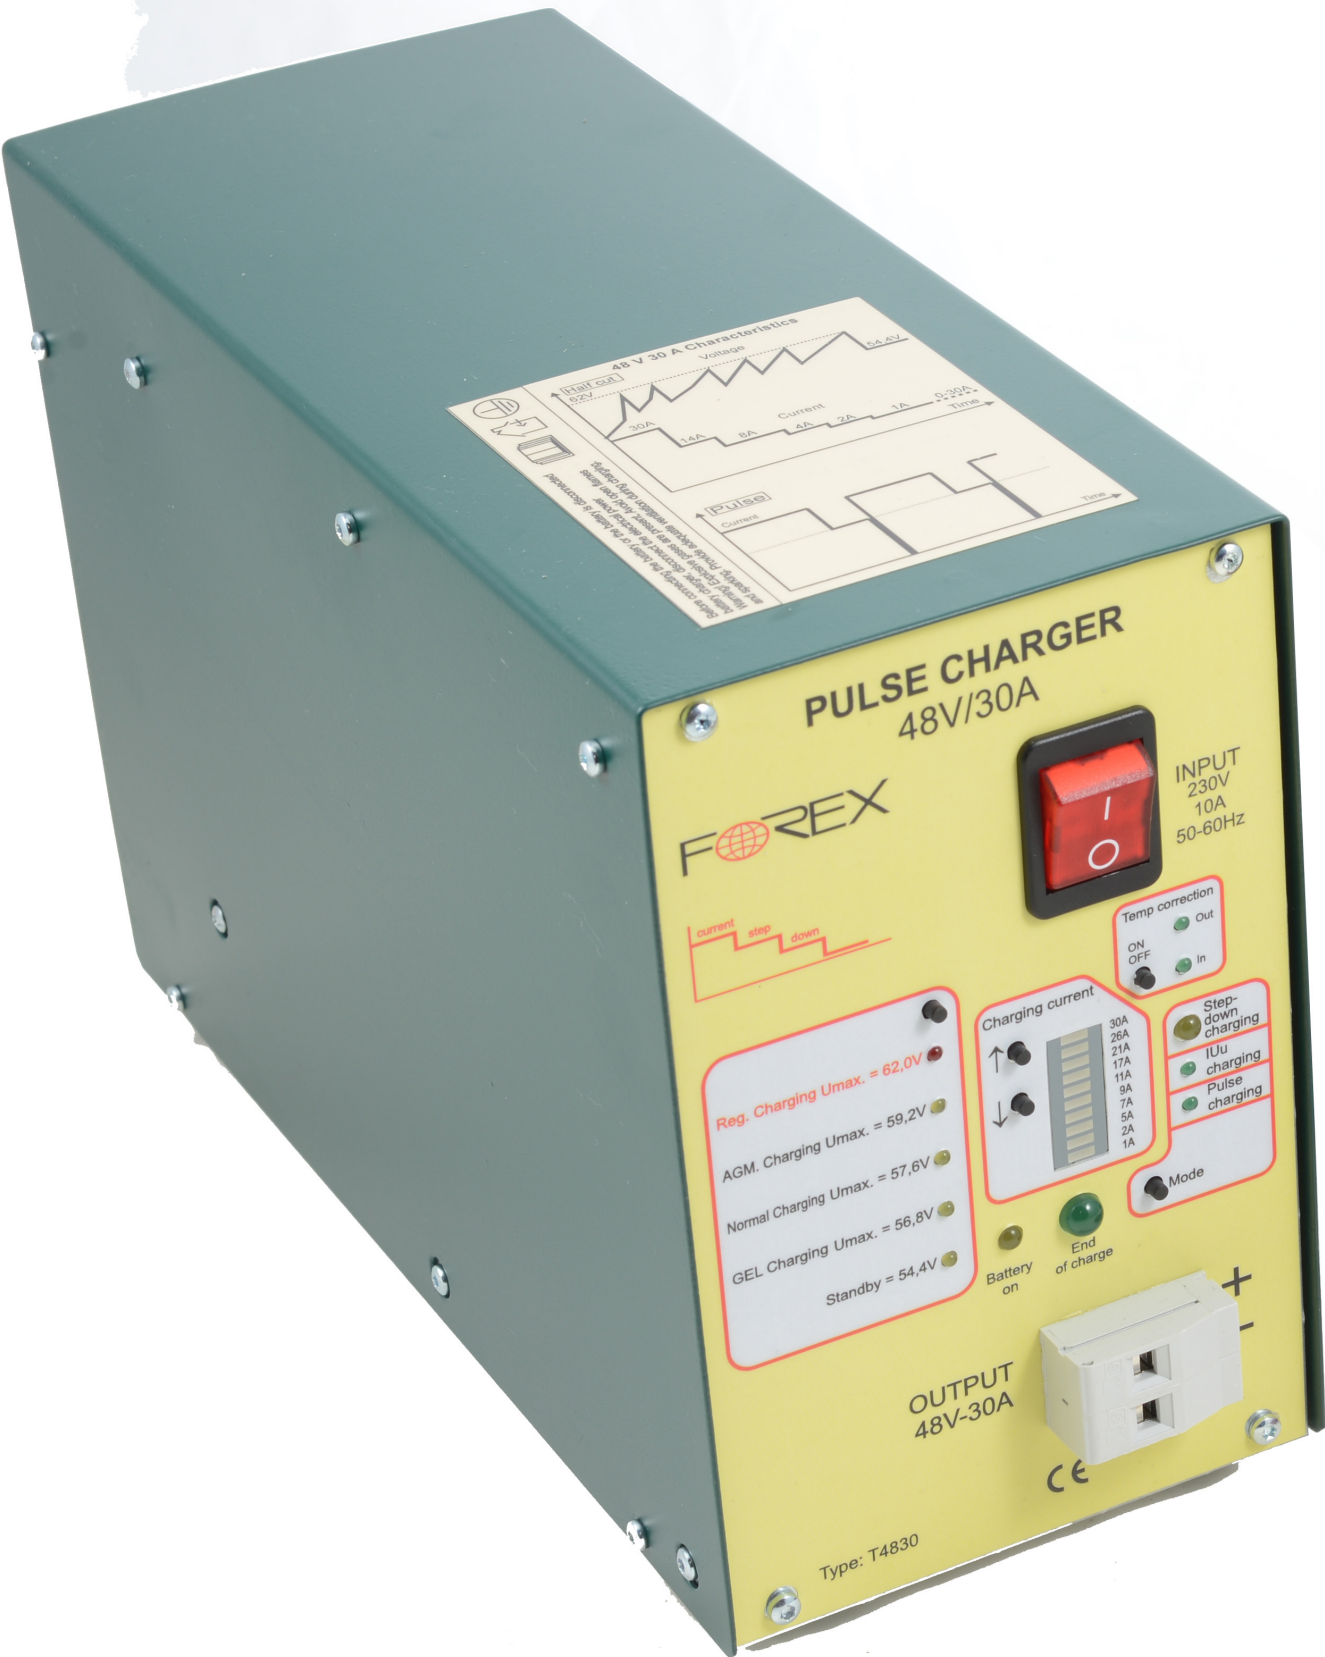



48V 30A IU Double voltage limitation Ventilator cooling

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

IU characteristic 48V 30A battery charger with adjustable charging voltage and charging current.

Technical Data

- nominal input voltage 230V,50Hz
- nominal output voltage 48 V
- max charging current 30A DC
- max. output voltage: 56,8V±0,1V
- secondary fuse :40 A
- current consumption from battery :50mA
- operation temperature: max.0-40°C
- charging characteristics: IU - 30A – 56,8V
- size: 115*190*280mm
- weight: 3,6kg
- IP class: 30
- protection: I.class